


REV. 1: REDUCED MINIMUM DRIVEWAY OPENING
AT STREET FROM 20' MIN. TO 16' MIN.

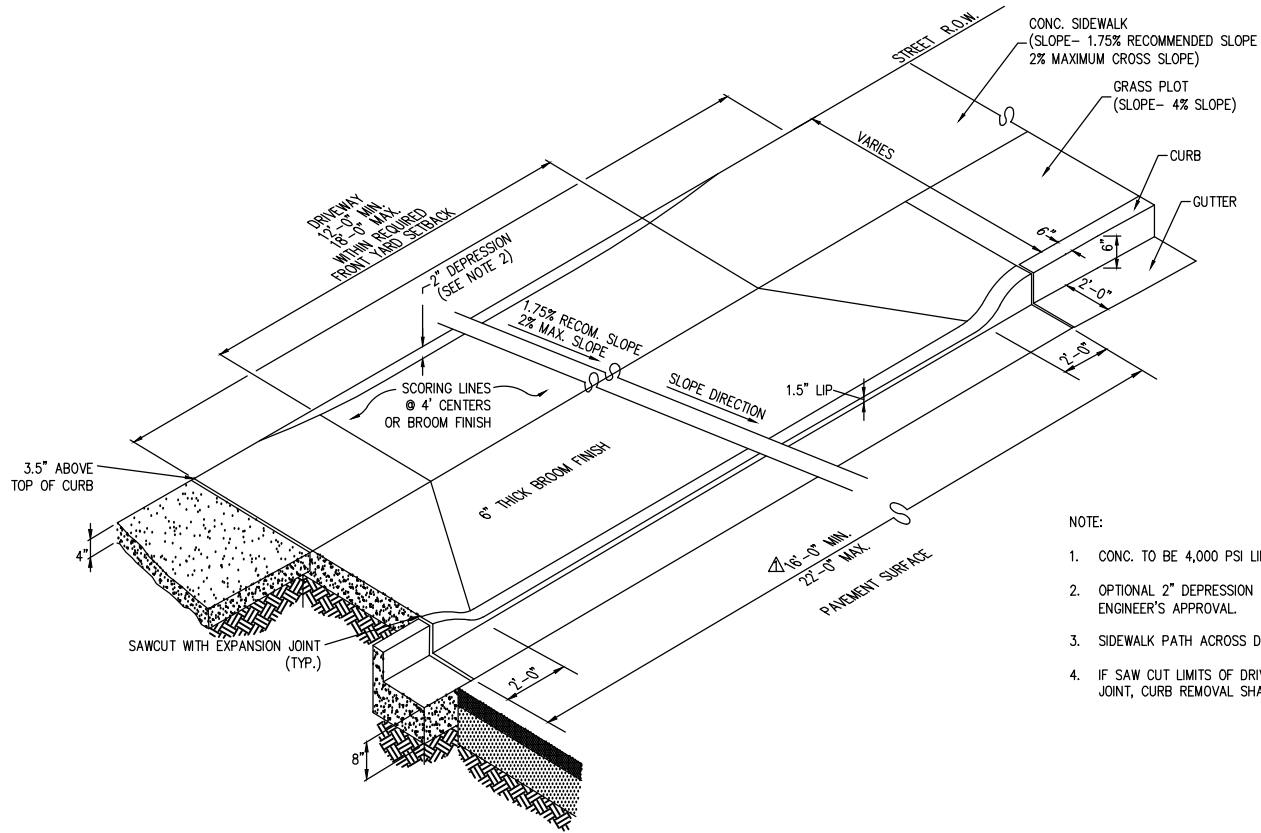

- NOTE:
1. CONC. TO BE 4,000 PSI LIMESTONE MIX, 5% AIR ENTRAINED, 6" THICK.
 2. OPTIONAL 2" DEPRESSION FOR STEEP, DOWNHILL DRIVEWAYS, WITH TOWN ENGINEER'S APPROVAL.
 3. SIDEWALK PATH ACROSS DRIVE APRON SHALL BE ADA COMPLIANT.
 4. IF SAW CUT LIMITS OF DRIVEWAY ARE 2' OR CLOSER TO AN EXISTING CONCRETE JOINT, CURB REMOVAL SHALL BE TAKEN TO THE JOINT.

DRAWN		
ENGR.		
REV.	DATE	APPROVED
1	04/17/18	TOA

TOWN OF ARLINGTON
Public Works Standard Details

RESIDENTIAL DRIVEWAY
TYPICAL SECTION



DATE
APPR.
DWG. NO.